


# Innsbruck Object Relation Dataset


This dataset contains the set of possible object-object spatial relations. Learning object-object relations is a difficult problem with sparse, noisy, corrupted and incomplete information which makes it an interesting and challenging machine problem. We treated this problem as the learning missing edges in a multigraph problem.

**Keywords:** missing link prediction, data inputation, matrix completion, recommender systems, low-rank approximation

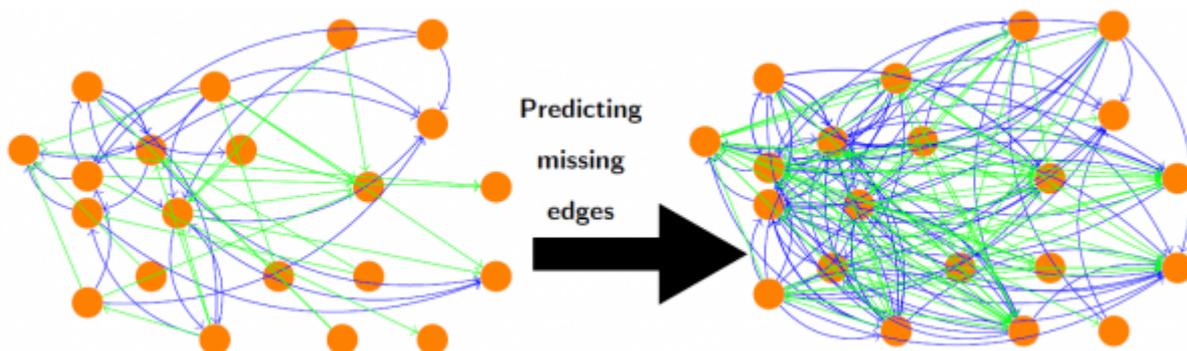

The learning scenario based on which this database was created is a toy clean-up task in a room of kids, where an agent needs to plan how to transform a messy child's room into a tidy one by moving objects to their storage locations and creating order. An agent can integrate knowledge on possible spatial relations of objects into the planning process and use it to renew the world model. Large numbers of objects and their potential interactions in this scenario make this task a large-scale problem. Estimating the missing relations based on those already known can accelerate planning procedures.

	teddy bear	bed			
box 2	1	0			
box 1	?	?	0	-1	0
box 1	0	1	?	?	?
box 1	0	-1	?	0	1
box 2	1	0	1	0	?
box 2	1	0	0	0	?
teddy bear	1	1	0	?	0
bed	0	?	-1	?	0
	on		in		below
					next to

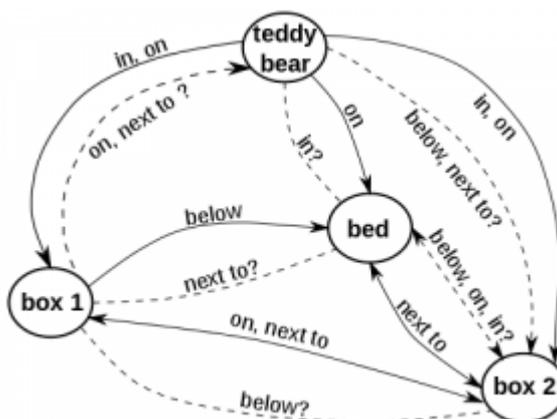

## Dataset Features

- Dataset is generated based on the [Princeton Shape Benchmark database](#)
- Dataset contains 4 sets for the each possible connection between objects (*in*, *on*, *below* and *next to*). The problem is formulated that all possible relations should be treated so two objects can have multiple connections.
- Links between objects are determined by values:
  - **0** - no connection
  - **1** - direct connection
  - **-1** - reverse connection
  - **empty** - unknown connection
- You can download dataset [here](#)

## Reference

*"Learning missing edges via kernels in partially-known graphs"*, Senka Krivic, Sandor Szedmak, Hanchen Xiong, Justus Piater, European Symposium on Artificial Neural Networks, Computational Intelligence and Machine Learning 2015. [PDF](#) Please cite this paper if you are using this dataset.

## BibTex

```
@InProceedings{Krivic-2015-ESANN,  
  title = {{Learning missing edges via kernels in partially-known graphs}},  
  author = {Krivi\{c}, Senka and Szedmak, Sandor and Xiong, Hanchen and  
  Piater, Justus},  
  booktitle = {{European Symposium on Artificial Neural Networks,  
  Computational Intelligence and Machine Learning}},  
  year = 2015,  
  url = {https://iis.uibk.ac.at/public/papers/Krivic-2015-ESANN.pdf}  
}
```

## Acknowledgement

This research has received funding from the European Community's Seventh Framework Programme FP7/2007-2013 (Specic Programme Cooperation, Theme 3, Information and Communication Technologies) under grant agreement no. 610532, [Squirrel](#) and no. 270273, [Xperience](#).

**Contact** [senka.krivic@uibk.ac.at](mailto:senka.krivic@uibk.ac.at)

From:

<https://iis.uibk.ac.at/> - IIS

Permanent link:

<https://iis.uibk.ac.at/datasets/ior?rev=1461248822>

Last update: **2018/09/03 14:57**

